

# SOLUTIONS ALUMINUM



*Maximize time on the job with products designed for high performance cutting, grinding, cleaning and finishing on aluminum and other soft metals.*

# ALUMINUM

Aluminum is durable, offers incredible strength for its weight, and is naturally resistant to corrosion. These attributes make it an attractive option when determining what material to use in metal fabrication.

Aluminum can be a challenging metal to work with because of its low melting temperature and tendency to load on abrasives, making them less effective. Choosing the right abrasive when working with aluminum can eliminate weld defects, maximize productivity and reduce overall consumable spend.

## ALUMINUM WELD DEFECTS REDUCE STRUCTURAL INTEGRITY

### WELD POROSITY

**PROBLEM:** Reduced weld strength and lower fatigue resistance.

**CAUSE:** Hydrogen gas dissolved in the molten weld.

**SOURCE:** Moisture, grease or other hydro-carbons in weld zone.

**SOLUTION:** **How to minimize weld porosity.**

Prior to welding, remove all surface contaminants including grease, oil, dirt or paint that can generate hydrogen gas or interfere with weld fusion. Use only high quality, contaminant-free products for surface prep and inter-pass grinding.

### OXIDE INCLUSIONS

**PROBLEM:** Reduced weld strength and lower fatigue resistance.


**CAUSE:** Aluminum oxide is not destroyed in the welding process.

**SOURCE:** Natural-occurring aluminum oxide on material prior to welding.

**SOLUTION:** **How to minimize oxide inclusions.**

Remove the thin, tough, transparent film of aluminum oxide from the metal surface. This process should be done just before starting the weld. Use only high quality, contaminant-free products for surface prep and inter-pass grinding.

### SEE THE DIFFERENCE

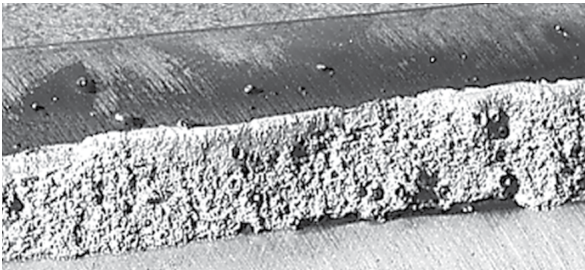

Aluminum weld without proper weld preparation exhibits porosity, resulting in an unacceptable weld.



Aluminum weld with proper weld preparation shows no pores.

## HOW ALUMINUM IS DIFFERENT FROM STEEL

**INCLUSIONS:** The oxide which occurs naturally on steel is destroyed during the welding process. Aluminum oxide is not destroyed during aluminum welding and must be removed prior to welding.

**HEAT EXPANSION:** When heated, aluminum expands twice as much as steel. As a result, warping and bending are significant issues.

**ELECTRICAL CONDUCTIVITY:** Since aluminum conducts electricity better than steel, welding parameters like amperage must be adjusted for different conductance.



# RESIN FIBER DISCS

Tiger Aluminum coated abrasive resin fiber & blending discs are **resistant to loading** so you can get the most demanding aluminum jobs done right and done fast.



Tiger Aluminum is specifically designed for high performance grinding on aluminum and other non-ferrous metals. Top coated, Tiger Aluminum releases a lubricant while grinding, reducing heat buildup. Lower grinding temperatures delay melting and prevent the disc from loading, which results in higher cut rates, long life and a superior finish.

**APPLICATIONS:** Heavy Stock Removal, Edge Chamfering, Weld Blending, Grinding and Surface Finishing



## TIGER ALUMINUM RESIN FIBER DISCS / Aluminum Oxide / Non-Loading on Non-Ferrous Metals

Specifically designed for high performance on ALUMINUM and other non-ferrous metals. A top coating grinds cool and is resistant to loading, which results in higher cut rates, long life and a superior finish.

Diameter	Grit Size	Standard Pack	7/8" Arbor	5/8"-11 Hub
4-1/2"	36	25	60401	60601
	60		60403	60603
	80		60404	—
5"	24	25	60410	—
	36		60411	60611 •
	80		60414	—
7"	36	25	60421	—
	60		60423	—

Do not exceed maximum RPM of back-up pad.





60603




60423

## TIGER ALUMINUM BLENDING DISCS / Aluminum Oxide / Non-Loading on Non-Ferrous Metals

Weiler's cloth backed coated abrasive blending discs are designed for use on right angle air tools. Available with either a metal hub or a plastic button fastening system, the flexible back-up pads give the discs a great deal of conformability.

Diameter	Grit Size	Standard Pack		
			Type S Hub Style	Type R Hub Style
2"	36	50	59869	59806
	60		—	59807
	80		59871	—
3"	36	25	—	59811
	60		59875	59812
	80		59876	59813




59806


• Non-stock product, contact Customer Service for lead times and minimum order quantities.

## TIGER ALUMINUM GRINDS COOL, CUTS FAST

Tiger Aluminum releases a lubricant which reduces heat buildup and loading on the disc, allowing grains to sustain a high rate and aggressively remove material.

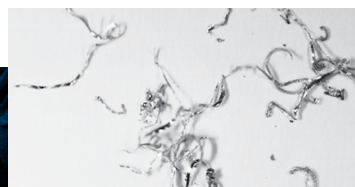

Metal shavings from Tiger Aluminum disc.

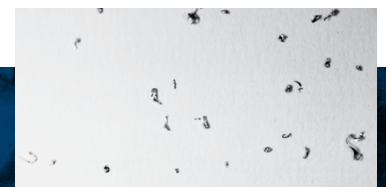

Metal shavings from a conventional disc.

# CUTTING & GRINDING WHEELS

**NON-LOADING WHEELS:** Tiger Aluminum is a new line of cutting, grinding, and combination wheels that deliver a non-loading solution that maximizes cut rates, increasing productivity when working with aluminum.



These wheels leverage a unique blend of abrasive grains and contaminant-free additives that work to prevent loading, resulting in higher cut rates and long wheel life.

*Tiger delivers high performance on aluminum:*

- **Non-loading** formula keeps the wheel from gumming up, allowing operators to get more work done in less time without compromising durability.
- Silicon carbide and aluminum oxide blend delivers a **consistently high cut rate** throughout the life of the wheel.
- **Extended wheel life** on aluminum reduces changeovers and lowers cost of use.
- **Contaminant-free** wheels deliver a worry-free solution for aluminum applications.

**APPLICATIONS:** Aluminum Cutting, Grinding, Heavy Stock Removal, Weld Removal, Weld Blending, Beveling and Chamfering

Delivers a  
**FAST CUT**  
for the life of the wheel

**LONG WHEEL LIFE**  
reduces changeovers  
and lowers cost of use

**NON-LOADING ON ALUMINUM**  
allows operators to get  
more work done in less time



## TIGER ALUMINUM CUTTING WHEELS\* / Silicon Carbide & Aluminum Oxide / Non-Loading

Tiger Aluminum wheels are specifically designed for high performance cutting on aluminum. These wheels blend abrasive grains with Weiler's non-loading formula, resulting in a fast and consistent cut rate on aluminum.

Diameter	Thickness	Grade	Max. RPM	TYPE 1 7/8" Arbor		TYPE 27 7/8" Arbor		TYPE 27 5/8"-11 Hub	
				Std. Pack	Item#	Std. Pack	Item #	Std. Pack	Item #
4-1/2"	.045"	ALU60S	13,300	25	58200	25	58205	10	58206
5"	.045"	ALU60S	12,200	25	58201	—	—	—	—
6"	.045"	ALU60S	10,200	25	58202	25	58209	10	58210
7"	.060"	ALU60S	8,500	25	58203	—	—	—	—

\*Contaminant-free, contains less than 0.1% Fe, S, Cl



58202



## TIGER ALUMINUM GRINDING WHEELS\* / Silicon Carbide & Aluminum Oxide / Non-Loading


Tiger Aluminum wheels are specifically designed for high performance grinding and extended wheel life on aluminum. These wheels blend abrasive grains with Weiler's non-loading formula, resulting in a fast and consistent cut rate on aluminum.

Diameter	Thickness	Grade	Max. RPM	TYPE 27 7/8" Arbor		TYPE 27 5/8"-11 Hub	
				Std. Pack	Item#	Std. Pack	Item #
4-1/2"	1/4"	ALU24R	13,300	10	58225	10	58226
5"	1/4"	ALU24R	12,200	10	58227	10	58228
6"	1/4"	ALU24R	10,200	10	58229	10	58230

\*Contaminant-free, contains less than 0.1% Fe, S, Cl



58225



## TIGER ALUMINUM COMBO WHEELS\* / Silicon Carbide & Aluminum Oxide / Non-Loading

Cut & grind combo wheels deliver true flexibility and efficiency when switching between cutting and grinding aluminum applications. These wheels blend abrasive grains with Weiler's non-loading formula, resulting in a fast and consistent cut rate on aluminum.

Diameter	Thickness	Grade	Max. RPM	TYPE 27 7/8" Arbor		TYPE 27 5/8"-11 Hub	
				Std. Pack	Item#	Std. Pack	Item #
4-1/2"	1/8"	ALU30T	13,300	25	58215	10	58216

\*Contaminant-free, contains less than 0.1% Fe, S, Cl



58216

## ALUMINUM ALLOYS

An aluminum alloy is a chemical composition where other elements are added to pure aluminum in order to enhance its properties, primarily to increase its strength. These other elements include iron, silicon, copper, magnesium, manganese and zinc at levels that combined may make up as much as 15 percent of the alloy by weight. Alloys are assigned a four-digit number, in which the first digit identifies a general class, or series, characterized by its main alloying elements.

### 3000 SERIES

Good Corrosion Resistance

Fair Strength

USES: Roofing, Siding, Gutters

### 5000 SERIES

Good Corrosion Resistance

Good Strength

USES: Marine Applications

### 6000 SERIES

Good Corrosion Resistance

Excellent Strength

USES: Structural, Pipe



# FLAP DISCS FOR GRINDING & FINISHING

Weiler's abrasive flap discs grind and finish in one step, saving you time and money. There's no switching from a Type 27 grinding wheel to a resin fiber disc.



## STYLE

### CONICAL (Type 29)

15° – 35°



The angled flaps maximize surface contact for aggressive stock removal on flat surfaces.

### FLAT (Type 27)

0° – 15°



Smooth grinding, blending and finishing on flat surfaces and slight contours.

### HIGH DENSITY (Type 27)

0° – 15°



Conformable to irregular surfaces. Smooth grinding, blending and finishing on flat surfaces.

### ANGLED (Type 27 / Hybrid)

0° – 35°



Curved flaps for grinding fillet welds, T-joints, and hard-to-reach areas.



Tiger Aluminum flap discs offer an innovative paired flap design that delivers high performance grinding on aluminum. The top flaps are coated to eliminate loading and allow the disc to maintain a high cut-rate, while the alternating flaps aggressively remove material with self-sharpening zirconia aluminum grains. This unique paired flap design delivers the ultimate combination of high performance grinding for aluminum at an exceptional value.

### PAIRED FLAP DESIGN

Delivers High Performance Grinding on Aluminum

### SELF SHARPENING

Zirconia Alumina Grains Deliver Aggressive Grinding

### COATED FLAPS

Eliminate Loading

**Coarse**  
36 Grit

Ideal for chamfering, beveling, weld removal and stock removal

**Fine**  
60 Grit

Ideal for weld blending, finishing and cosmetic detail work



51250



51257

### CONICAL

### HIGH PERFORMANCE / TIGER® ALUMINUM

Non-Loading / Contaminant-free / Zirconia Alumina / Phenolic Back

#### ALUMINUM

Diameter	Grit	Max. RPM	Std. Pack	TYPE 29 7/8" Arbor	TYPE 29 5/8"-11 Hub
				Item #	Item #
4-1/2"	36	13,000	10	51250	51254
	60			51251	51255

### FLAT

### HIGH PERFORMANCE / TIGER® ALUMINUM

Non-Loading / Contaminant-free / Zirconia Alumina / Phenolic Back

#### ALUMINUM

Diameter	Grit	Max. RPM	Std. Pack	TYPE 27 7/8" Arbor	TYPE 27 5/8"-11 Hub
				Item #	Item #
4-1/2"	36	13,000	10	51252	51256
	60			51253	51257



Tiger Ceramic Saber Tooth flap discs deliver maximum performance on aluminum and other hard to grind non-ferrous metals. A grinding aid protects high value parts from heat discoloration and the self-sharpening ceramic alumina grain provides cool, fast-cutting action, allowing you to do more work, more quickly. Discs are contaminant-free, with iron, sulfur and chlorine less than 0.1%.



**CONTAMINANT FREE**  
CONTAIN LESS THAN 0.1%  
IRON, SULFUR & CHLORINE

## TIGER CERAMIC FLAP DISCS / Ceramic Alumina / Conical Style (Type 29) / Phenolic Backing

The conical shape of the disc maximizes surface contact for aggressive stock removal on flat surfaces.

Diameter	Grit Size	Max. RPM	Std. Pack	7/8" Arbor	5/8"-11 Hub
4-1/2"	36	13,000	10	50100	50104
	40			50101	50105
	60			50102	50106
	80			50103	50107
7"	36	8,600	10	—	50112
	40			50109	50113

◆ Patent # 6,945,863



50102

## TIGER CERAMIC HIGH DENSITY (HD) FLAP DISCS

**Ceramic Alumina / Flat Style (Type 27) / Phenolic Backing**

High Density discs are conformable to irregular surfaces. Smooth grinding, blending and finishing on flat surfaces.

Diameter	Grit Size	Max. RPM	Std. Pack	7/8" Arbor	5/8"-11 Hub
4-1/2"	40	13,000	10	50130	50133
	60			50131	50134
	80			50132	50135
	—			—	—
7"	40	8,600	10	50136	50139
	60			—	50140
	80			—	50141
	—			—	—

◆ Patent # 6,945,863



50139

## TIGER CERAMIC TRIMMABLE FLAP DISCS

**Ceramic Alumina / Conical Style (Type 29) / Composite Backing**

Weiler's Trimmable Tiger flap discs are designed for hard-to-reach areas such as fillet welds and irregular shapes while grinding on-edge without changing tools. The unique composite backing can be trimmed, exposing more abrasive material and extending disc life, resulting in lower grinding and finishing costs.

Diameter	Grit Size	Max. RPM	Std. Pack	7/8" Arbor	5/8"-11 Hub
4-1/2"	40	13,000	10	50117	50121
	60			50118	50122

◆ Patent # 6,945,863



50121

## TIGER CERAMIC ANGLED FLAP DISCS

**Ceramic Alumina / Hybrid Style / Phenolic Backing**

Tiger Angled flap discs deliver an aggressive, long life solution for grinding fillet welds, T-joints and other hard-to-reach places. Top-sized ceramic alumina grain offers a contaminant-free option that grinds cool, delivering maximum performance on aluminum and other hard-to-grind metals.

Diameter	Grit Size	Max. RPM	Std. Pack	7/8" Arbor	5/8"-11 Hub
4-1/2"	40	13,000	10	51312	51315
	60			51313	51316
	80			51314	51317
	—			—	—
5"	40	12,000	10	51318	51321
	60			51319	51322



51318

# NON-WOVEN FOR FINISHING

Weiler's non-woven products help you get the most demanding jobs done right and done fast.



54510

Interleaf flap wheels provide a combination of non-woven and coated abrasive material to produce a very conformable product designed to be a finishing and surface blending tool. They are ideal for producing satin or decorative finishes on irregular or contoured surfaces.

**APPLICATIONS:** Decorative Finishing, Satin and Antique Finishes, Final Sanding, Soft Metal Finishing, Fine Burr Removal



## STEM-MOUNTED INTERLEAF FLAP WHEELS / Aluminum Oxide

Diameter	Face Width	Grit Size	Stem Size	Max. RPM	Standard Pack	Item Number
2"	1"	120	1/4"	13,700	10	54500
		180				54501
		320				54502
		320				54508
3"	1"	120	1/4"	8,600	5	54506
		180				54507
		320				54508
3"	2"	120	1/4"	8,600	5	54509
		180				54510



51460

For cleaning and conditioning surfaces by hand. Unlike steel wool, hand pads are non-metallic, and do not produce "after-rust" on work surfaces. Hand pads can be used in wet applications.

## HAND PADS

Size	Grain	Grade	Description	Standard Pack	Item Number
<b>Industrial Grade:</b> For producing satin finishes, light deburring surface prep, blend light scratches					
6" x 9"	Silicon Carbide	Ultra Fine	Finishing (Grey)	60	51434
6" x 9"	Aluminum Oxide	Medium	Economy General Purpose (Maroon)	60	51460
6" x 9"	Aluminum Oxide	Med/ Coarse	General Purpose (Maroon)	60	51444
6" x 9"	Aluminum Oxide	Heavy-Duty	Heavy-Duty (Tan)	40	51454
<b>Commercial Grade:</b> For cleaning and removing stains, removing corrosion and oxidation					
6" x 9"	Aluminum Oxide	Fine	Economy (Green)	400	51456
6" x 9"	Aluminum Oxide	Medium	Standard-Duty (Green)	60	51457

51457

Surface conditioning discs have an open construction, scrim reinforcement and a superior resin system. These features minimize loading, heat buildup, fraying of disc edges, grain shedding and extend disc life, providing superior performance.

**APPLICATIONS:** Light Deburring, Surface Finishing, Blending Light Scratches



51532

## TYPE R HUB STYLE CONDITIONING DISCS / General Purpose

Compatible with 3M Roloc™ back-up pads.



Diameter	Grade	Standard Pack	Item Number
2"	Very Fine (Blue)	50	51530
	Medium (Maroon)		51531
	Coarse (Brown)		51532
	Very Fine (Blue)		51533
3"	Medium (Maroon)	25	51534
	Coarse (Brown)		51535
	Very Fine (Blue)		51533



# POWER BRUSHES FOR CLEANING

Superior construction, the highest quality materials, state-of-the-art manufacturing, and exacting quality standards deliver the most consistent brush performance. Each Weiler brush is designed to provide the best performance at the lowest cost-of-use.



## WIRE SELECTION

To maximize brush life and reduce costs, always use the finest wire that will get the job done without excessive applied pressure or engagement with the brush.

Coarse			Medium			Fine		Very Fine	
.035	.023	.020	.014	.0118	.0104	.0095	.008	.006	.005
LESS			Flexible					MORE	
MORE			Aggressive					LESS	
LESS			Resistant to Fatigue & Breakage					MORE	

## FILL SELECTION



### Stainless Steel Wire

Recommended for cleaning surfaces before welding to eliminate naturally occurring oxide layer.



### Non-Ferrous Wire

(Brass, Bronze & Aluminum)  
Can be used on aluminum to create decorative antique finishes.

### CIRCULAR FLARED END BRUSHES / 302 Stainless Steel / 1/4" Stem

Features crimped wire fill that has been "pre-flared" to match the working angle of the brush at operating speed; suited for addressing broad and slightly contoured surfaces.



Diameter	Wire Size	Max. RPM	Standard Pack	Item Number
1"	.006	25,000	1	10042
	.008			10043
1-1/2"	.006	20,000	1	10045
	.008			10046
2-3/4"	.008	16,000	2	10048
	.006			10151
3"	.006	16,000	2	10050
	.008			10050



10151

### CRIMPED WIRE END BRUSHES / 302 Stainless Steel / Coated Cup / 1/4" Stem

Features a solid end construction and very flexible brushing action ideal for more demanding cleaning applications in corners and hard-to-reach areas. The plastic sleeve covering the cup protects the work surface from being scratched or marked.



Diameter	Wire Size	Trim Length	Overall Length	Max. RPM	Standard Pack	Item Number
1/2"	.006	7/8"	2-9/16"	25,000	10	11010
3/4"	.006	7/8"	2-9/16"	22,000	10	11013
1"	.006	7/8"	2-3/4"	22,000	10	11016



11013

### CRIMPED WIRE END BRUSHES / 302 Stainless Steel / Nickel-plated Cup / 1/4" Stem

Features a solid end construction and very flexible brushing action ideal for more demanding cleaning applications in corners and hard-to-reach areas. **The nickel-plated cup is compliant with DOD MIL STD 2041D(SH).**



Diameter	Wire Size	Trim Length	Overall Length	Max. RPM	Standard Pack	Item Number
3/4"	.006	7/8"	2-9/16"	22,000	10	10374 •
1"	.006	1"	2-7/8"	22,000	10	10378



10378

• Non-stock product, contact Customer Service for lead times and minimum order quantities.

## CONTROLLED FLARE END BRUSHES ♦ / 302 Stainless Steel

Features uniquely trimmed crimped wire fill for more effective brushing action and greatly enhanced durability when cleaning corners and fillet welds.



10321

Diameter	Wire Size	Trim Length	Overall Length	Max. RPM	Standard Pack	Item Number
1/2"	.0104	7/8"	2-9/16"	25,000	10	10313
3/4"	.0104	7/8"	2-9/16"	22,000	10	10317
1"	.0104	1"	2-7/8"	22,000	10	10321

♦ Patent #8,186,000 B2

## CRIMPED WIRE PILOT BONDING BRUSHES

302 Stainless Steel / Banded / Solid End / 1/4" Stem

Originally designed to clean around rivet holes in aluminum aircraft panels but may be used in other similar applications.



10056

Diameter	Wire Size	Trim Length	Overall Length	Pilot Diameter	Max. RPM	Standard Pack	Item Number
1/2"	.005	3/8"	2-1/4"	3/32"	20,000	10	10056
1/2"	.005	3/8"	2-1/4"	1/8"	20,000	10	10057
1/2"	.005	3/8"	2-1/4"	5/32"	20,000	10	10058
1/2"	.005	3/8"	2-1/4"	3/16"	20,000	10	10059

## CONFLEX BRUSHES / 302 Stainless Steel / 1/4" Stem

Provides a flexible brushing action and consistent performance for demanding light-duty cleaning and deburring applications; features a wider face width to cover more area.



17608

Diameter	Wire Size	Face Width	Trim Length	Max. RPM	Standard Pack	Item Number
1-3/4"	.008	1/2"	5/8"	20,000	10	17608
3"	.008	1"	15/16"	20,000	10	17637

## CONCAVE BRUSHES / 302 Stainless Steel / 1/4" Stem

Provides flexible brushing action for addressing corners and hard-to-reach areas.



17930

Diameter	Wire Size	Face Width	Trim Length	Max. RPM	Standard Pack	Item Number
1-1/2"	.006	1/4"	3/8"	20,000	10	17930
3"	.006	1/2"	15/16"	20,000	10	17936

## UTILITY CRIMPED WIRE CUP BRUSHES / 302 Stainless Steel / 1/4" Stem

Provides flexible brushing action and consistent performance for more demanding light-duty cleaning applications.



14303

Diameter	Wire Size	Trim Length	Overall Length	Max. RPM	Standard Pack	Item Number
1-3/4"	.006	3/4"	2-5/16"	13,000	10	14303 •
2"	.008	5/8"	2-7/8"	13,000	10	14318 •
2-1/2"	.008	7/8"	3-1/8"	13,000	10	14320 •

• Non-stock product, contact Customer Service for lead times and minimum order quantities.

## 302 STAINLESS STEEL

Weiler's stainless steel wire brushes are manufactured using wire drawn from Type 302 stainless steel. Although 302 stainless is typically a non-magnetic material, it is important to remember that the amount of cold-working that it experiences during the wire-drawing process causes it to become magnetic. For this reason, proper storage and handling of stainless steel brushes is critical to prevent cross-contamination and

"after rust" issues. Type 302 is widely used in the manufacture of power brushes for its relative durability and aggressive action as well as for its austenitic properties that insure the corrosion resistance of the materials on which it is applied. The use of a different grade of stainless steel wire is typically required in critical weld preparation and cleaning applications, but it will not address "after rust" and other cross-contamination issues.

## SMALL DIAMETER WHEELS / 302 Stainless Steel

These wheels provide a flexible brushing action and consistent performance for light-duty cleaning and deburring applications requiring a small wheel. Ideal for wire stripping and thread cleaning.




Diameter	Wire Size	Arbor Hole	Face Width	Trim Length	Max. RPM	Standard Pack	Item Number
1"	.003 .005	1/4"	3/16"	1/4"	20,000	10	16461 16471
1-1/4"	.006 .008	1/4"	1/4"	3/8"	20,000	10	— 16521
1-1/2"	.006 .008	3/8"	1/4"	7/16"	20,000	10	16702 16712
2"	.005 .008	1/2"	3/8"	3/4"	20,000	10	16833 16843
3"	.006 .008	1/2"-3/8"	5/8"	1"	20,000	10	16933 16943



16712

## TAMPICO WHEELS / Tampico Fiber

Ideal for light-duty surface cleaning and scrubbing applications as well as scratch-free finishing and polishing. Natural fiber such as Tampico holds abrasive compounds well and can be used for deburring, edge blending, and polishing applications.



Diameter	Arbor Hole	Face Width	Trim Length	Max. RPM	Standard Pack	Item Number
3"	1/2"	1/2"	1"	20,000	10	17453
6"	2"	5/8"	1-1/2"	6,000	10	20180
8"	2"	5/8"	2-1/2"	5,000	5	20190



17453

20180

## PLATER'S WIRE WHEELS / Brass

These wheels feature a longer trim length and very small diameter wire size for producing fine satin and antique finishes on non-ferrous and precious metals.



Diameter	Wire Size	Arbor Hole	Face Width	Trim Length	Number of Rows	Max. RPM	Standard Pack	Item Number
4"	.004	1/4"	1"	1-1/4"	4	4,000	5	22061 •

• Non-stock product, contact Customer Service for lead times and minimum order quantities.



22061

## STANDARD TWIST BEVEL BRUSHES / 302 Stainless Steel

These wheels provide a heavy-duty brushing action with some flexibility; ideal for cleaning fillet welds and corners.



Diameter	Wire Size	Arbor Hole	No. of Knots	Face Width	Trim Length	Max. RPM	Standard Pack	Item Number
4"	.014	5/8"-11 UNC	20	3/8"	3/4"	12,500	1	13416
4-1/2"	.014	5/8"-11 UNC	20	3/8"	1"	12,500	1	13466



13416

## CRIMPED WIRE WHEEL / 302 Stainless Steel

Brush provides a flexible brushing action and consistent performance for demanding light-duty cleaning and deburring applications.



Diameter	Wire Size	Arbor Hole	Face Width	Trim Length	Max. RPM	Standard Pack	Item Number
4"	.006	5/8"-11 UNC	1/2"	7/8"	14,000	5	00156



00156



# SCRATCH BRUSHES FOR CLEANING

Weiler’s scratch brush offering includes many block and handle types and sizes. Common applications include cleaning dirt, rust, scale, chips and paint; plating and welding operations.



## PLATER’S BRUSHES / 302 Stainless Steel / Hardwood Block

For general cleaning in the plating, metal finishing, aircraft and missile industries. Also used with inert arc aluminum welding.

Block Size	Brush Length	Number of Rows	Trim Length	Standard Pack	Item Number
<b>.006 Stainless Steel Wire</b>					
10" x 1-1/8"	5"	4 x 18	1"	12	44240
13" x 7/8"	5-1/2"	3 x 19			44660
13" x 1-1/8"	5-1/2"	4 x 19			44232



## SMALL HAND SCRATCH BRUSHES / 302 Stainless Steel

Ideal for cleaning and prepping surfaces.

Block Size	Block	Number of Rows	Trim Length	Standard Pack	Item Number
<b>.006 Stainless Steel Wire</b>					
7-1/2" x 1-1/2"	Plastic	3 x 7	1/2"	36	44075
7-1/2" x 1-1/2"	Wood	3 x 7	1/2"		44167
7-3/4" x 3/8"	Wood	3 x 7	1/2"		44551 *
8-3/4" x 1/2"	Wood	2 x 9	5/8"		95013
<b>.008 Crimped Aluminum</b>					
6-3/4" x 1-5/8"	Wood	6 x 9	5/8"	12	95151
8-3/4" x 1/2"	Wood	2 x 9	5/8"	36	44251

\*Wire drawn



For the full offering of Weiler products, please refer to our Full Line Catalog or visit our website. To discuss specific requirements with a product specialist call 888.299.2777.

