


FLAP DISCS ALUMINUM OXIDE

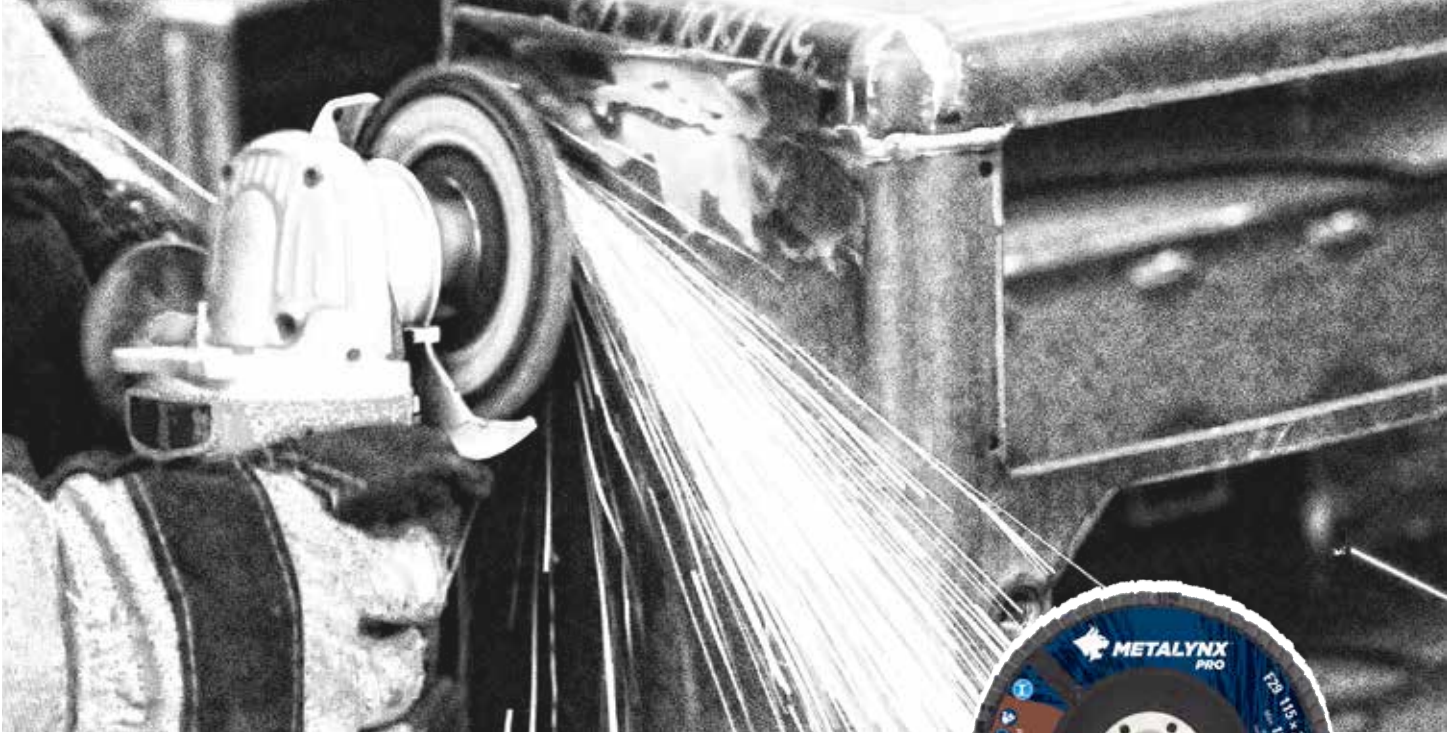

Weiler's coated abrasive flap discs grind and finish in one step, saving you time and money. There's no switching from a type 27 grinding wheel to a resin fiber disc.

PRO PERFORMANCE LINE

Metalynx Pro flap discs are designed to deliver performance, consistency, reliability, and quality when grinding and finishing metal. The aluminum grain flap disc provides consistent performance.



ALUMINUM OXIDE (AO)



- Single crystal that dulls during use
- Good initial cut rate
- Hard, durable grain

BEST ON: Carbon Steel, Structural Steel, Iron and general purpose metal use



PRO ALUMINUM OXIDE

Aluminum Oxide / Phenolic Backing



Dimensions D x H mm	Grit	Speed m/s	Max. RPM min ⁻¹	F27		F29	
				Standard Pack pc/box	Item Number	Standard Pack pc/box	Item Number
100 x 16	40	80	15300	—	—	10	388710
	60			10	388707	10	388711
	80			10	388708	10	388712
	120			10	388709	10	388713
115 x 22,23	40	80	13300	10	388714	10	388718
	60			10	388715	10	388719
	80			10	388716	10	388720
	120			10	388717	10	388721
125 x 22,23	40	80	12250	10	388726	10	388722
	60			10	388727	10	388731
	80			10	388728	10	388732
	120			10	388729	10	388733
180 x 22,23	40	80	8500	10	388746	10	388743
	60			10	388747	10	388744
	80			10	388741	10	388745
	120			10	388742	10	388748
230 x 22,23	40	80	6650	10	388749	10	388753
	60			10	388750	10	388754
	80			10	388751	10	388755
	120			10	388752	10	388756

STYLE / TYPE

FLAT STYLE

Type F27

0° – 15°

Makes it easier to control grinding directions and is therefore suitable for edge treatment.

CONICAL STYLE

Type F29

15° – 25°

Maximum aggression for fast stock removal. The angle provides greater surface contact for maximum stock removal.

GRIT

Coarse Grit

Fine Grit

40

60

80

120

HEAVY STOCK REMOVAL

EDGE BEVELING / CHAMFERING

WELD GRINDING / BLENDING

DEBURRING / DEFLASHING

RUST REMOVAL / BLENDING / FINISHING

CLEANING / FINISHING